
## SADA 2

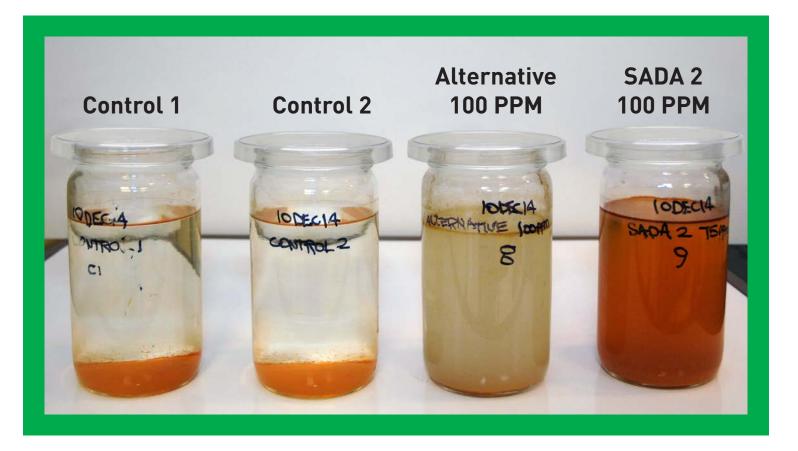

The corrosion test was done with steel pipe sections in synthetic water (300 ppm  $CaCO_3$ , 75 ppm  $MgSO_4$ ; pH 8.3) for 5 days at 30°C. The pipe sections were suspended in the synthetic water, and cleanup was observed on the pipe and in the water. Results indicate SADA 2 (100 ppm) cleaned more effectively than the control (blanks) and a competitive product (100 ppm).

Seller warrants that this product conforms to its chemical description and is reasonably fit for the purpose referred to in the directions for use when used in accordance with the directions under normal conditions. Buyer assumes the risk of any use contrary to such directions. Seller makes no other warranty or representation of any kind, express or implied, concerning the product, including NO IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS OF THE GOODS FOR ANY OTHER PARTICULAR PURPOSE. No such warranties shall be implied by law and no agent of seller is authorized to alter this warranty in any way except in writing with a specific reference to this warranty. The exclusive remedy against seller shall be a claim for damages not to exceed the purchase price of the product, without regard to whether such a claim is based upon breach of warranty or tort.

E523W [05/15]